


## Technical Data – HAS940

### Product description

- Antislip tape
- Colour: Fluorescent yellow

### Construction

- #36 grit aluminium oxide
- PVC carrier (100µm)
- Solvent acrylic adhesive
- 100gsm paper liner

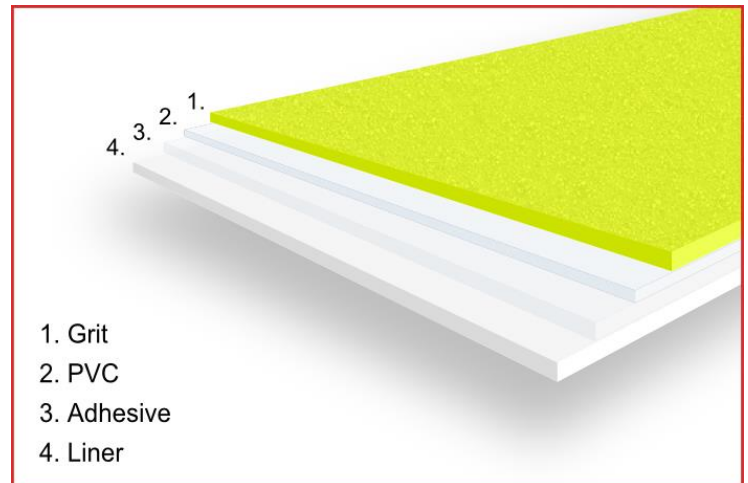

### Technical data

Item	Unit		Spec.		Test method
Total thickness	mm	in	1.2 ± 0.2	.0472 ± .0079	-
Carrier thickness	Mm	In	0.1	0.0039	-
Adhesion	g/25mm	lb/in	1500	3.307	-
Tensile strength	g/625mm <sup>2</sup>	Lb/in <sup>2</sup>	6000	13.228	-
Elongation at break	%	-	25	-	-
Water resistance	-	-	GOOD	-	-
UV resistance	-	-	GOOD	-	-
Temperature range	°C	°F	-30 ~ 60	-22 ~ 140	-

### Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.



### High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS  
 Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044  
 email: [sales@hi-bondtapes.co.uk](mailto:sales@hi-bondtapes.co.uk)  
[www.hi-bondtapes.com](http://www.hi-bondtapes.com)

Company Registration No. 3985595



MEMBER  
 GERMAN-BRITISH  
 CHAMBER OF INDUSTRY & COMMERCE