


Technical Data – HB392

Product description

- Double sided PVC tape
- Colour: White

Construction

- Yellow Glassline Paper 110g/m²
- Acrylic adhesive

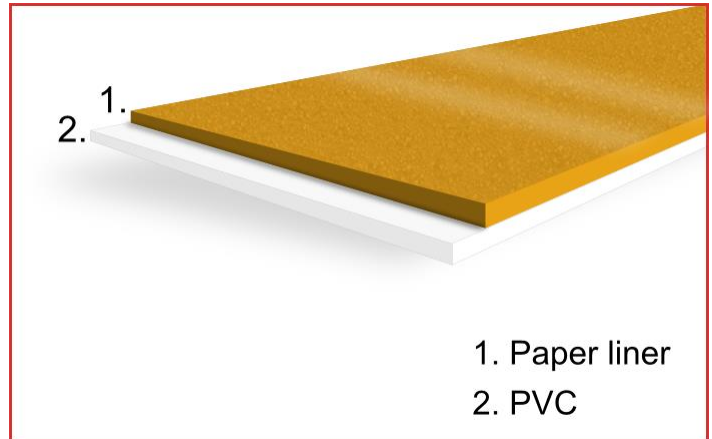

1. Paper liner
2. PVC

Technical data

Item	Unit		Spec.		Test method
Carrier Thickness	µm	in	60	.0024	-
Overall Thickness	µm	in	250	.010	-
Adhesive (acrylic)	-	-	-	-	-
Adhesive strength	g/cm ²	lbs/in ²	>2500	>36	PSTC-1
Holding power for temperature resistance 60°C	h	-	>24	-	PSTC-7 (25x25mm, 0.5kg/1.1lbs)
Initial Tack (A/B side)	cm	in	<5	<2	PSTC-6 (#14 BALL)
Temperature resistance	°C	°F	-30~+90	-22~+194	-

Remarks

1. Testing conditions: Lab temperature 23±5°C; Lab humidity 55%±10% RH.
2. To be stored under constant temperature of 10~20°C; avoid exposing to high humidity.
3. Under normal condition, it can be stored for one year.

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.



High Performance Tapes and Adhesive Products

1 Crucible Road, Phoenix Parkway, Corby, Northamptonshire NN17 5TS
 Telephone: +44 (0)1536 260022 Fax: +44 (0)1536 260044
 email: sales@hi-bondtapes.co.uk
 www.hi-bondtapes.com

Company Registration No. 3985595



MEMBER
GERMAN-BRITISH
CHAMBER OF INDUSTRY & COMMERCE