


Technical Data – CD556AS

Product description

- Premium quality transparent protection film
- Anti-static treatment
- Prevents the attachment of dust and particles
- High grade acrylic adhesive for clean remove

Construction

- PET (40µm)
- Anti-static treatment
- Silicone PSA adhesive (7µm)
- PET release liner

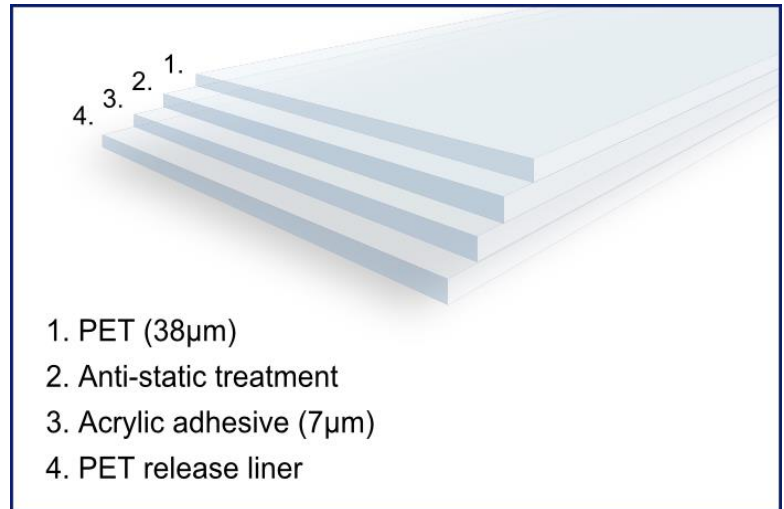

Technical data

| Item | Unit | | Spec. | | Test method |
|------------------|---------|---------|-------|--------|-------------|
| Base thickness | µm | Inch | 38 | 0.0015 | ASTM D3652 |
| Total thickness | µm | Inch | 45 | 0.0018 | ASTM D3652 |
| Peel Strength | Gf-25mm | ozf-in | 9 | 0.0005 | ASTM D3330 |
| Tensile strength | kg/25mm | lb/inch | 5 | 27.775 | ASTM D3759 |

Application

1. Protection in manufacturing processes and for shipping
2. For use on glass, PMMA and PC

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. Hi-Bond Tapes Ltd. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.